

POLARIS


OFF ROAD



RANGER



RZR

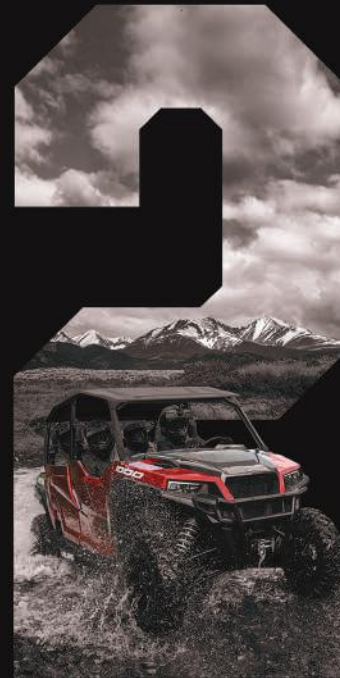

GENERAL



SPORTSMAN

THE WORLD LEADER IN OFF ROAD

THE BEST MEMORIES ARE MADE OFF ROAD

Never at rest, we are always moving, searching and pushing beyond. Our shared passion for the outdoors is what drives us, and determination and inventiveness are what defines us as we pursue new off-road experiences.





POLARIS

OFF ROAD

RANGER 04

RZR 10

GENERAL 17

SPORTSMAN 19

YOUTH/HIGH LIFTER 25

SPECS 29



THE ULTIMATE COMBINATION OF PRICE AND PERFORMANCE



INTRODUCING THE ALL-NEW **RANGER 1000**

Say hello to the newest addition to the industry's best 1000 lineup. We took the best-selling RANGER ever, the RANGER XP 900, and gave it the capability to haul more, tow more and last longer while delivering more comfort, more convenience and more value for your hard-earned dollar.

ENGINEERED FOR WORK

Our legendary smoothest-riding, hardest-working promise beats on in the heart of the new RANGER 1000. Smoother low-speed drivability and increased agility combine for a perfect balance of big-work capability and all-day comfort.

61
HORSEPOWER

55 LB-FT
TORQUE

2,500 LB
TOWING CAPACITY



DESIGNED FOR COMFORT

With 25% thicker seats, 5" of additional space to get in and out of the cab and more creature comforts including 18.6 gallons of integrated storage, long days will feel a lot shorter.



BUILT TO LAST

A new, stronger one-piece chassis is built to withstand more and haul bigger loads, while a full-body skidplate fends off unseen objects.

THE UNDISPUTED LEADER IN UTILITY SIDE-BY-SIDES



STEP-UP TO THE INDUSTRY'S BEST

RANGER XP 1000

KING OF THE CATEGORY. Defined by industry-leading power and toughness, the RANGER XP 1000 overdelivers in every way. With an unbeatable combination of big-load capability, all-day comfort and optional full-cab protection from the elements, you'll have all you'll need to finish big jobs, tackle tough trails and outlast the longest days.

RANGER XP 1000

POLARIS
FACTORY CHOICE
PACKAGES

ELEVATE YOUR OFF-ROAD EXPERIENCE
WITH FACTORY-INSTALLED PACKAGES.

ALL-NEW

BACK COUNTRY PACKAGE



ULTIMATE HUNT MACHINE

ARCHED A-ARMS | PRO HD 4,500LB WINCH | HIGH-MOUNTED AIR-INTAKE | 900W STATOR
SEALED ELECTRICAL COMPONENTS | ACTIVE DESCENT CONTROL | 20% STRONGER DRIVELINE

ALL-NEW

WINTER PREP PACKAGE



CONQUER THE COLD

PRO HD 4,500LB WINCH | CAB SEAL KIT | HEATER KIT | 900W STATOR

RIDE COMMAND PACKAGE

SNOW REMOVAL MADE EASY

Blade automatically raises and lowers with gear selection in Plow Mode.

GROUP RIDE

Keep track of everyone in your group, even when they're out of sight.

GPS NAVIGATION

Plan your ride and know where you're at with built-in GPS mapping.



MB QUART® AUDIO PACKAGE



REAR ROOF
SPEAKERS

300W OVERHEAD AUDIO
VISOR SPEAKERS

MAX BOOST 10" 250W
SUBWOOFER



RANGER XP 1000

RANGER XP 1000

RANGER

RZR

GENERAL

SPORTSMAN

YOUTH/HIGH LIFTER

RIDE COMMAND

SPECS

THE INDUSTRY'S MOST DEPENDABLE LINEUP

MADE FOR EVERY JOB AND EVERY PASSION. With the RANGER family, unrivaled value meets unparalleled capability, which is exactly what generations have come to expect from the world leader in utility side-by-sides. Regardless of what challenges you face, there's a RANGER that will get you over the finish line.

RANGER 570



RANGER CREW XP 1000



**STANDARD
1 YEAR
LIMITED WARRANTY**

All 2020 RANGER models are backed by a standard 1-year limited warranty.
*1-year warranty excludes, High Lifter and youth models.



RANGER CREW 1000

CHOOSE YOUR RANGER

2-SEAT

BEST-IN-CLASS UTILITY VALUE

- » 2-SEAT CAPACITY
- » UP TO 44HP
- » 1,500LB TOWING CAPACITY
- » 10" GROUND CLEARANCE



MODEL SHOWN: RANGER 570

3-SEAT

MAXIMUM CAPABILITY

- » 3-SEAT CAPACITY
- » UP TO 82HP
- » UP TO 2,500LB TOWING CAPACITY
- » UP TO 13" GROUND CLEARANCE



MODEL SHOWN: RANGER 1000

CREW

COMFORTABLE SEATING UP TO 6

- » UP TO 82HP
- » UP TO 2,500LB TOWING CAPACITY
- » UP TO 1,750LB PAYLOAD CAPACITY
- » UP TO 13" GROUND CLEARANCE



MODEL SHOWN: RANGER CREW XP 1000



RANGER XP 1000
NORTHSTAR EDITION



PRO CLASS IS IN SESSION



INTRODUCING THE ALL-NEW

RZR PRO XP

The next generation of RZR is here—and it's the most agile, most capable, most versatile RZR ever built. Offering power and control without compromise, it's engineered to make you feel at one with the machine. Built stronger and tougher for the world's most unforgiving playgrounds, it will take your off-road experience to another level.



PRO XP ULTIMATE

- » DYNAMIX ACTIVE SUSPENSION 2.0
- » RIDE COMMAND 7" DISPLAY
- » ROCKFORD FOSGATE PREMIUM AUDIO
- » LED HEADLIGHTS AND ACCENT LIGHTS
- » 6-POINT RETRACTABLE HARNESS
- » TELESCOPIC STEERING WHEEL
- » INTEGRATED STEERING WHEEL CONTROLS
- » FOX 2.5 LIVE VALVE SHOCKS
- » PREMIUM PAINTED PANELS



PRO XP PREMIUM

- » LED HEADLIGHTS AND ACCENT LIGHTS
- » 6-POINT RETRACTABLE HARNESS
- » TELESCOPIC STEERING WHEEL WITH BUTTON CONTROLS
- » WALKER EVANS 2.5 NEEDLE SHOCKS
- » PREMIUM PAINTED PANELS



PRO XP



PRO CLASS IS IN SESSION



INTRODUCING THE ALL-NEW

RZR PRO XP

Introducing the next generation of RZR—power and control without compromise. Engineered to make you feel at one with the machine and built stronger and tougher for the world's most unforgiving playgrounds. It's time to take your off-road experience to the next level.



181
HORSEPOWER

22"
USABLE TRAVEL

96"
WHEELBASE

14.5"
GROUND
CLEARANCE

PRO PERFORMANCE

Its power when and where you crave it most. It's suspension that redefines control and travel through unrelenting terrain, and handling with instant response and flat-out stability that's unprecedented.



DYNAMIX 2.0
ACTIVE SUSPENSION

POLARIS
RIDECOMMAND

VISIONARY DESIGN

It leads with a visual punch. A menacing stance and distinctive cut signal the unmatched performance and technology within, providing a driver-centric execution of absolute off-road dominance.



BRUTE STRENGTH

Designed to absorb punishment in the world's most unforgiving playgrounds. Featuring the strongest chassis we've ever made, with stouter axles, cooler clutching and capability that breaks all barriers.



ADRENALINE RUNS IN THE FAMILY

A PERFORMANCE SXS FOR
EVERY KIND OF TERRAIN

RZR XP TURBO S



ENGINEERED TO ACCELERATE THE SENSES. The industry leader by every measure including the sport's most complete lineup of performance side by sides. There's a RZR for every terrain and every passion.

RZR XP 1000 PREMIUM



RZR RS1

CHOOSE FROM THE INDUSTRY'S LEADING LINEUP

PRO

ALL-NEW

RZR PRO XP
181HP



XTREME PERFORMANCE

RZR XP TURBO S
168HP



RZR RS1
110HP

RZR XP 1000
110HP

RZR XP TURBO
168HP

TRAIL

RZR S 1000
100HP



RZR 570
45HP

RZR 900
75HP

RZR S 900
75HP

RZR XP 1000
TRAILS & ROCKS

- » 30" Pro Armor Crawler XG Tires
- » Polaris Pro HD 4,500LB Winch
- » HMW Skid Plate
- » Rock Sliders
- » 55% Lower Low Gear
- » Bull Bumper
- » Lower Doors



RZR XP 1000
HIGH LIFTER

- » 55% Lower Low Gear
- » High-Mount Intakes & Vent Lines
- » Low Speed Throttle Mapping
- » Xtreme Performance AWD
- » Hi-Clearance Arms & Rods
- » 4,500LB Winch
- » Lower Doors



TAKE THE DAY **OFF ROAD**



POLARIS
GENERAL

ELEVATE YOUR ADVENTURE. Take on the world with a vehicle that has an appetite for exploration as big as yours. Powerful, capable and comfortable, GENERAL defines performance without limitations no matter where your adventures take you.

100
HORSEPOWER

600LB
CARGO BOX
(DUMP BOX)

12"
GROUND
CLEARANCE



UNSTOPPABLE PERFORMANCE



UNRIVALED COMFORT



UNFORGETTABLE EXPERIENCE

CHOOSE YOUR GENERAL

BASE

- » 100HP ENGINE
- » STANDARD HALF DOORS
- » ELECTRONIC POWER STEERING (EPS)
- » 600LB DUMP BOX
- » 1,500LB TOWING CAPACITY
- » 23L INTEGRATED STORAGE
- » LOCK & RIDE COMPATIBLE
- » VERSATRAC TURF MODE

MODEL SHOWN:
POLARIS GENERAL 1000



PREMIUM

BASE FEATURES PLUS:

- » AUTOMOTIVE PAINT
- » NEW LED HEADLIGHTS
- » LOW-PROFILE FRONT BUMPER
- » POLARIS HD 4,500LB WINCH

MODEL SHOWN:
POLARIS GENERAL 1000 PREMIUM



DELUXE

PREMIUM FEATURES PLUS:

- » NEW ROCKFORD FOSGATE STAGE 1 AUDIO
- » FOX 2.0 PODIUM X QS3 SHOCKS
- » POLARIS LOCK & RIDE SPORT ROOF
- » REARVIEW MIRROR

MODEL SHOWN:
POLARIS GENERAL 1000 DELUXE



MULTI-PASSENGER

- » LOW-PROFILE FRONT BUMPER
- » POLARIS HD 4,500LB WINCH
- » NEW FOX 2.0 PODIUM X QS3 SHOCKS
- » 27" GBC DIRT COMMANDER 8-PLY TIRES
- » NEW LED HEADLIGHTS

MODEL SHOWN:
POLARIS GENERAL 4 1000 DELUXE





THE WORLD'S
BIGGEST,
BADDEST ATV
IS HERE

INTRODUCING THE ALL-NEW

SPORTSMAN XP 1000 S

UNEXPECTED. UNPRECEDENTED. It's time to break the rules with the industry's first sport-utility ATV boasting a massive 55" wide stance. Featuring jaw-dropping capabilities, it redefines control, reinvents durability and reimagines the segment.



55"
WIDE STANCE

1,750LB
TOWING CAPACITY

14.5"
GROUND
CLEARANCE

12.5"/14"
FRONT & REAR
SUSPENSION



UNCOMPROMISING CONTROL. New ProSteer Technology eliminates bump-steer and allows the XP 1000 S to deliver fluid, predictable steering with assured confidence in challenging terrain at even more challenging speeds.



UP TO
14.5"
GROUND
CLEARANCE



8 GAL
SEALED
STORAGE



UP TO
1,750 LBS
TOWING
CAPACITY

FORGE NEW PATHS

WITH LEGENDARY
PERFORMANCE



POLARIS
FACTORY CHOICE
PACKAGES

ELEVATE YOUR OFF
ROAD EXPERIENCE
WITH FACTORY
INSTALLED PACKAGES

ALL-NEW

TRAIL PACKAGE

- » NEW LED HEADLIGHTS
- » DUAL ARCHED A-ARMS
- » 3,500LB WINCH
- » 27" DURO POWERGRIP TIRES
- » PAINTED SPRINGS
- » SEALED BUSHINGS



Available only on select 850 & XP 1000 ATVs

ALL-NEW

UTILITY PACKAGE

- » NEW FRONT & REAR
METAL RACKS
- » FRONT UTILITY
BUMPER



Available only on select 450, 570, & 570 EPS ATVs

CHOOSE YOUR SPORTSMAN



SPORTSMAN XP 1000 S

- » 55" WIDE STANCE
- » 12.5"/14" TRAVEL
- » 1,750LB TOWING CAPACITY
- » 14.5" GROUND CLEARANCE



SPORTSMAN 850 PREMIUM

- » 78HP
- » 1,500LB TOWING CAPACITY
- » DUAL A-ARMS
- » PREMIUM PAINTED PLASTIC
- » ALUMINUM WHEELS



SPORTSMAN 570 EPS

- » 44HP
- » 11" GROUND CLEARANCE
- » 48" WIDE STANCE



SPORTSMAN 450

- » 33HP
- » 10.5" GROUND CLEARANCE
- » 48" WIDE STANCE

SPORTSMAN XP 1000

THE INDUSTRY'S BIGGEST LINEUP OF YOUTH OFF ROAD VEHICLES

FIRST IMPRESSIONS ARE IMPORTANT. No other ride in the off-road journey is more impactful than the first one. Polaris has a vehicle that offers the right fit, the right power and unrivaled safety for the next generation of off-road enthusiasts.



OUTLAW 110 EFI

AGES 10+



SPORTSMAN 110 EFI

AGES 10+



RANGER 150 EFI

AGES 10+



RZR 170

AGES 10+



PHOENIX 200

AGES 14+



TOTAL MUD DOMINANCE

WITH **HIGHLIFTER** EDITIONS



ENGINEERED FROM THE INSIDE OUT TO TAKE IT ON. The Polaris High Lifter lineup offers extreme performance for the most challenging of terrains. Built with higher ground and obstacle clearance in mind and outfitted with mud-specific transmissions, these machines will help you cut through the deep and dominate the depths no matter what your riding style or preference.



POLARIS RIDE COMMAND

A WORLD OF OFF-ROAD CONNECTION AT YOUR FINGERTIPS.
RIDE COMMAND includes a Glove Touch capable 7" off-road display that acts as the hub of your system and integrates your phone, GPS, audio and communication systems.



NEW PLOW MODE

PLOW WITH EASE. With the all-new RIDE COMMAND Plow Mode, even the most challenging snowfalls become much less of a hassle. The plow automatically engages based on the gear the vehicle is in, so when you shift to drive, the plow lowers and when you put the vehicle in reverse, the plow lifts.



NEW GROUP RIDE

UNITED WE RIDE. Communicate, navigate and stay connected as a group while you take on terrains and trails with the Group Ride feature. New to RANGER, RZR, and GENERAL models, it provides a more unified multi-vehicle experience with live location viewing through your smartphone or vehicle-installed antenna.



YOUTH RIDE COMMAND

FREEDOM YOU CONTROL. With Youth RIDE COMMAND you can keep young riders safe through the convenience of your smartphone. Geofencing allows you to set up a user-defined, invisible ride boundary. Digital speed limiting lets you select the speed that's appropriate for their age and abilities.

2-SEAT

3-SEAT



RANGER EV

RANGER 500

RANGER 570

RANGER 570 PREMIUM

RANGER 570 FULL-SIZE

RANGER 1000

RANGER 1000 PREMIUM

RANGER XP 1000 PREMIUM

RANGER XP 1000 NORTHSTAR EDITION

ENGINE & DRIVETRAIN

Engine Type	Single 48-Volt, High-Efficiency, AC-Induction Motor	500cc, 4-Stroke Single-Cylinder	567cc, 4-Stroke Single-Cylinder DOHC	567cc, 4-Stroke Single-Cylinder DOHC	567cc, 4-Stroke Single-Cylinder DOHC	999cc, 4-Stroke Twin-Cylinder SOHC	999cc, 4-Stroke Twin-Cylinder SOHC	999cc, 4-Stroke Twin-Cylinder DOHC	999cc, 4-Stroke Twin-Cylinder DOHC
Horsepower	30 HP	32 HP	44 HP	44 HP	44 HP	61 HP	61 HP	82 HP	82 HP
Drive System	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	High-Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High-Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High-Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High-Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode
Engine Braking System	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard	Standard

SUSPENSION

Front Suspension	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	Dual A-Arm 10" (25.4 cm) Travel	Dual A-Arm 10" (25.4 cm) Travel	Dual A-Arm 11" (27.94 cm) Travel	Dual A-Arm 11" (27.94 cm) Travel
Rear Suspension	Dual A-Arm, IRS 9" (22.9 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4cm) Travel	Dual A-Arm, IRS 10" (25.4cm) Travel	Dual A-Arm, IRS 11" (27.94 cm) Travel	Dual A-Arm, IRS 11" (27.94 cm) Travel

TIRES & WHEELS

Front Tires	25 x 9-12; Carlisle	25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489	25 x 8-12; 489	25 x 10-12; 489	26 x 9-12; PXT 2.0	27 x 9-12; Maxxis MU51	27 x 9-12; Maxxis MU51
Rear Tires	25 x 9-12; Carlisle	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489	25 x 11-12; 489	26 x 11-12; PXT 2.0	27 x 11-12; Maxxis MU52	27 x 11-12; Maxxis MU52
Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Aluminum Black Xcelerator	Stamped Steel	Stamped Steel	Aluminum Black Xcelerator 2.0	Aluminum Black Xcelerator 2.0	Aluminum Black Xcelerator 2.0

DIMENSIONS & CAPACITIES

Wheelbase	72" (182.9 cm)	73" (185.4 cm)	73" (185.4 cm)	73" (185.4 cm)	79" (202 cm)	81" (206 cm)	81" (206 cm)	81" (206 cm)	81" (206 cm)
Dry Weight	1,762 lb (799 kg)	1,065.9 lb (483 kg)	1,073 lb (487kg)	1,102 lb (500 kg)	1,070.9 lb (486 kg)	1,429 lb (648 kg)	1,537 lb (697 kg)	1,565 lb (710 kg)	1,875 lb (850 kg)
Overall Vehicle Size (L x W x H)	110 x 58 x 73" (279 x 147 x 185 cm)	110 x 58 x 73" (279 x 147 x 185 cm)	110 x 58 x 73" (279 x 147 x 185 cm)	110 x 58 x 73" (279 x 147 x 185 cm)	114 x 60 x 74" (290 x 152 x 188 cm)	120 x 62.5 x 76" (305 x 158 x 193 cm)	120 x 62.5 x 76" (305 x 158 x 193 cm)	120 x 62.5 x 77" (305 x 158 x 196 cm)	120 x 65 x 77" (305 x 165 x 196 cm)
Ground Clearance	10" (25.4 cm)	10" (25.4 cm)	10" (25.4 cm)	10" (25.4 cm)	10.5" (26.7 cm)	12" (30.5 cm)	12" (30.5 cm)	13" (33 cm)	13" (33 cm)
Seating Capacity	2	2	2	2	3	3	3	3	3
Fuel Capacity	N.A.	9 gal (34.1 L)	9 gal (34.1 L)	9 gal (34.1 L)	9 gal (34.1 L)	11.35 gal (43 L)	11.35 gal (43 L)	11.5 gal (43.5 L)	11.5 gal (43.5 L)
Bed Box Dimensions (L x W x H)	32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)
Box Capacity	N.A. / 500 lb (226.8 kg)	N.A. / 500 lb (226.8 kg)	N.A. / 500 lb (226.8 kg)	N.A. / 500 lb (226.8 kg)	N.A. / 800 lb (363 kg)	N.A. / 1,000 lb (453 kg)	N.A. / 1,000 lb (453 kg)	N.A. / 1,000 lb (453 kg)	N.A. / 1,000 lb (453 kg)
Payload Capacity	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,000 lb (453.6 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,275 lb (578.3 kg)
Hitch Towing Rating	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)

FEATURES

Electronic Power Steering	Not Equipped	Accessory Optional	Accessory Optional	Standard	Not Equipped	EPS Available	Standard	Standard	Standard
Adjustable Driver's Seat	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard	Standard	Standard
Tilt Steering	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard

PACKAGES

						Winter Prep	Winter Prep	Back Country, Ride Command, Ride Command with MB Quart® Audio, Winter Prep	Cab Upgrade, Ride Command, Ride Command with MB Quart® Audio
--	--	--	--	--	--	-------------	-------------	--	--

COLORS

Avalanche Gray, Polaris Pursuit Camo	Sage Green, Solar Red	Sage Green, Polaris Pursuit Camo	Silver Pearl	Solar Red, Sage Green	Sage Green, Solar Red Polaris Pursuit Camo* <small>*EPS Model only</small>	Sunset Red Metallic, Matte Military Tan, Matte Titanium	Steel Blue Metallic, Sand Metallic, Matte Sagebrush Green, Orange Rust Metallic, Polaris Pursuit Camo	Steel Blue Metallic, Sand Metallic, Matte Sagebrush Green, Orange Rust Metallic, Polaris Pursuit Camo
--------------------------------------	-----------------------	----------------------------------	--------------	-----------------------	---	---	---	---

CREW



**RANGER XP 1000
HIGH LIFTER EDITION**

RANGER CREW 570-4

**RANGER CREW 570-4
PREMIUM**

**RANGER CREW 570
FULL-SIZE**

RANGER CREW 1000

**RANGER CREW 1000
PREMIUM**

**RANGER CREW XP 1000
PREMIUM**

**RANGER CREW XP 1000
NORTHSTAR EDITION**

**RANGER CREW XP 1000
HIGH LIFTER EDITION**

999cc, 4-Stroke Twin-Cylinder DOHC	567cc, 4-Stroke Single-Cylinder DOHC	567cc, 4-Stroke Single-Cylinder DOHC	567cc, 4-Stroke Single-Cylinder DOHC	999cc, 4-Stroke Twin-Cylinder SOHC	999cc, 4-Stroke Twin-Cylinder SOHC	999cc, 4-Stroke Twin-Cylinder DOHC	999cc, 4-Stroke Twin-Cylinder DOHC	999cc, 4-Stroke Twin-Cylinder DOHC
82 HP	44 HP	44 HP	44 HP	61 HP	61 HP	82 HP	82 HP	82 HP
High-Performance On-Demand True AWD / 2WD	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD / VersaTrac Turf Mode	High Performance On-Demand True AWD / 2WD
Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard	Standard	Standard
Independent Arched Lower A-Arm 11" (27.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	MacPherson Strut 9" (22.9 cm) Travel	Dual A-Arm 10" (25.4 cm) Travel	Dual A-Arm 10" (25.4 cm) Travel	Dual A-Arm 11" (27.9 cm) Travel	Dual A-Arm 11" (27.9 cm) Travel	Independent Arched Lower A-Arm 11" (27.9 cm) Travel
Independent Arched Lower A-Arm 11" (27.9 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 10" (25.4 cm) Travel	Dual A-Arm, IRS 11" (27.9 cm) Travel	Dual A-Arm, IRS 11" (27.9 cm) Travel	Independent Arched Lower A-Arm 11" (27.9 cm) Travel
28 x 9.5-14; Outlaw 2	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489* <small>*26" Tires on EPS model</small>	26 x 9-12; PXT 2.0	27 x 9-12; Maxxis® MU51	27 x 9-12; Maxxis® MU51	28 x 9.5-14; Outlaw 2
28 x 11-14; Outlaw 2	25 x 10-12; 489	25 x 10-12; 489	25 x 10-12; 489	25 x 11-12; 489* <small>*26" Tires on EPS model</small>	26 x 11-12; PXT 2.0	27 x 11-12; Maxxis® MU52	27 x 11-12; Maxxis® MU52	28 x 11-14; Outlaw 2
Cast Aluminum Buckle	Stamped Steel	Aluminum Black Xcelerator	Stamped Steel	Stamped Steel	Aluminum Black Xcelerator 2.0	Aluminum Black Xcelerator 2.0	Aluminum Black Xcelerator 2.0	Cast Aluminum Buckle
81" (206 cm)	105" (266.7 cm)	105" (266.7 cm)	107" (272.6 cm)	113" (287 cm)	113" (287 cm)	113" (287 cm)	113" (287 cm)	113" (287 cm)
1,773 lb (804 kg)	1,326.2 lb (603 kg)	1,351.2 lb (614 kg)	1,392.5 lb (632 kg)	1,626 lb (738 kg)	1,794 lb (814 kg)	1,829 lb (830kg)	2,290 lb (1,039 kg)	2,116 lb (960 kg)
122 x 65 x 78" (310 x 165 x 198 cm)	142 x 60 x 73" (361 x 152 x 185 cm)	142 x 60 x 73" (361 x 152 x 185 cm)	146 x 60 x 74" (370 x 152 x 188 cm)	152 x 62.5 x 76" (385 x 158 x 193 cm)	152 x 62.5 x 76" (385 x 158 x 193 cm)	152 x 62.5 x 77" (386 x 158 x 196 cm)	152 x 65 x 78" (386 x 165 x 198 cm)	154 x 65 x 78" (391 x 165 x 198 cm)
13.5" (34.3 cm)	10" (25.4 cm)	10" (25.4 cm)	10.5" (26.7 cm)	12" (28.7 cm)	12" (28.7 cm)	13" (33 cm)	13" (33 cm)	13.5" (34.3 cm)
3	4	4	6	6	6	6	6	6
11.5 gal (43.5 L)	9 gal (34.1 L)	9 gal (34.1 L)	9 gal (34.1 L)	11.35 gal (43 L)	11.35 gal (43 L)	11.5 gal (43.5 L)	11.5 gal (43.5 L)	11.5 gal (43.5 L)
36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	32 x 42 x 11.5" (81 x 107 x 29 cm)	36.5 x 54 x 11.5" (93 x 137 x 29 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)	36.75 x 54.2 x 12.5" (93.3 x 137.8 x 31.8 cm)
N.A. / 1,000 lb (453 kg)	N.A. / 500 lb (226.8 kg)	N.A. / 500 lb (226.8 kg)	N.A. / 800 lb (363 kg)	N.A. / 1,000 lb (453.6 kg)	N.A. / 1,000 lb (453.6 kg)	N.A. / 1,000 lb (453.6 kg)	N.A. / 1,000 lb (453.6 kg)	N.A. / 1,000 lb (453.6 kg)
1,500 lb (680.4 kg)	1,250 lb (567 kg)	1,250 lb (567 kg)	1,500 lb (680.4 kg)	1,750 lb (793.8 kg)	1,750 lb (793.8 kg)	1,750 lb (793.8 kg)	1,350 lb (612.3 kg)	1,525 lb (691.7 kg)
2,500 lb (1,133.9 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)	2,500 lb (1,133.9 kg)
Standard	Accessory Optional	Standard	Not Equipped	EPS Available	Standard	Standard	Standard	Standard
Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Standard	Standard	Standard	Standard
Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
				Winter Prep	Winter Prep	Back Country, Ride Command, Ride Command with MB Quart® Audio, Winter Prep	Cab Upgrade, Ride Command, Ride Command with MB Quart® Audio	
Onyx Black	Sage Green, Polaris Pursuit Camo	Silver Pearl	Sage Green	Sage Green, Polaris Pursuit Camo* <small>*EPS Model only</small>	Matte Titanium	Steel Blue Metallic, Sand Metallic, Matte Sagebrush Green, Polaris Pursuit Camo	Steel Blue Metallic, Sand Metallic, Sage Green, Polaris Pursuit Camo	Onyx Black

RANGER
RZR
GENERAL
SPORTSMAN
YOUTH/HIGH LIFTER
RIDE COMMAND
SPECS

TRAIL

XTREME PERFORMANCE



RZR 570 AVAILABLE EPS **RZR 900 AVAILABLE EPS** **RZR S 900 AVAILABLE EPS** **RZR S 1000** **RZR RS1** **RZR XP 1000** **RZR XP 1000 PREMIUM** **RZR XP TURBO** **RZR TURBO S VELOCITY** **RZR TURBO S**

ENGINE & DRIVETRAIN

Engine Type	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged
Horsepower	45 HP	75 HP	75 HP	100 HP	110 HP	110 HP	110 HP	168 HP	168 HP	168 HP
Drive System	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD <i>High-Performance True On-Demand AWD / 2WD</i>	True On-Demand AWD / 2WD <i>High-Performance True On-Demand AWD / 2WD</i>	High-Performance True On-Demand AWD / 2WD	Isolated Xtreme Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	High-Performance True On-Demand AWD / 2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD
Engine Braking System	Not Equipped <i>Standard</i>	Standard	Standard	Standard	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped

SUSPENSION

Front Suspension	Dual A-Arm with Stabilizer Bar and 9" (22.9 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar and 10" (25.4 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar and 21" (53.4 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 25" (63.5 cm) Usable Travel, 19" (48.2 cm) of Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar & 25" (63.5 cm) Usable Travel, 19" (48.2 cm) Wheel Travel
Front Shocks	ZF Sachs	ZF Sachs	FOX 2.0 PERFORMANCE PODIUM <i>2" Walker Evans Needle with 16-Position Adjustable Clickers</i>	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	Walker Evans® 2.5" Velocity Needle Shock with 16-Position Adjustable Clickers	FOX 2.5 Podium Internal Bypass Shocks with Live Valve (Electronically Controlled Damping)
Rear Suspension	Dual A-Arm with Stabilizer Bar 9.5" (24 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar 10" (25.4 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar 12.25" (31.1 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar 13.2" (33.5 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 21" (53.3 cm) Usable Travel, 18" (45.7 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 18" (45.7 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 18" (45.7 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 18" (45.7 cm) Wheel Travel	Trailing Arm & High-Clearance Radius Rods with Stabilizer Bar and 25 in (63.5 cm) Usable Travel, 21 in (53.3 cm) of Wheel Travel	Trailing Arm & High-Clearance Radius Rods w/ Stabilizer Bar, 25" (63.5 cm) Usable Travel, 21" (53.3 cm) Travel
Rear Shocks	ZF Sachs	ZF Sachs	FOX 2.0 PERFORMANCE PODIUM <i>2" Walker Evans Needle with 16-Position Adjustable Clickers</i>	2" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle Shocks with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	Walker Evans® 3.0" Velocity Needle Shock with 16-Position Adjustable Clickers	FOX 3.0 Podium Internal Bypass Shocks with Live Valve (Electronically Controlled Damping)

TIRES & WHEELS

Front Tires	25 x 8-12; Ancla <i>25 x 8-12; Maxxis</i>	26 x 8-12; PXT	27 x 9-12; GBC <i>Dirt Commander</i>	27 x 9-12; GBC <i>Dirt Commander</i>	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn	32 x 10-15; ITP COYOTE (8-Ply Rated)	32 x 10-15; ITP COYOTE (8-Ply Rated)
Rear Tires	25 x 10-12; Ancla <i>25 x 10-12; Maxxis</i>	26 x 9-12; PXT	27 x 11-12; GBC <i>Dirt Commander</i>	27 x 11-12; GBC <i>Dirt Commander</i>	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn	32 x 10-15; ITP COYOTE (8-Ply Rated)	32 x 10-15; ITP COYOTE (8-Ply Rated)
Wheels	Stamped Steel <i>Cast Aluminum</i>	Stamped Steel <i>Cast Aluminum</i>	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum

DIMENSIONS & CAPACITIES

Wheelbase	77" (196 cm)	79" (200.7 cm)	79" (200.7 cm)	79" (200.7 cm)	83" (210.8 cm)	90" (228.6 cm)	90" (228.6 cm)	90" (228.6 cm)	90" (228.6 cm)	90" (228.6 cm)
Dry Weight	996 lbs (452 kg) <i>1,077 lbs (489 kg)</i>	1,150 lbs (522 kg) <i>1,176 lbs (533 kg)</i>	1,204 lbs (546 kg) <i>1,230 lbs (558 kg)</i>	1,255 lbs (560 kg)	1,371 lbs (623kg)	1,448 lbs (658 kg)	1,458 lbs (663 kg)	1,512 lbs (687 kg)	1,731 lbs (787 kg)	1,781 lbs (810 kg)
Overall Vehicle Size (L x W x H)	107.5 x 50 x 69" <i>(273 x 127 x 175.2 cm)</i>	107 x 50 x 69.5" <i>(271.8 x 127 x 176.5 cm)</i>	108 x 60 x 72" <i>(274.3 x 152.4 x 182.9 cm)</i>	108 x 60 x 71.5" <i>(274.3 x 152.4 x 181.6 cm)</i>	112" x 64" x 73.75" <i>(284.5 x 162.6 x 187.3 cm)</i>	119 x 64 x 73.7" <i>(302.2 x 162.6 x 187.3 cm)</i>	119 x 64 x 73.7" <i>(302.2 x 162.6 x 187.3 cm)</i>	119 x 64 x 73.7" <i>(302.2 x 162.6 x 187.3 cm)</i>	122" x 72" x 75" <i>(309.9 x 182.8 x 190.5 cm)</i>	122" x 72" x 75" <i>(309.9 x 182.8 x 190.5 cm)</i>
Ground Clearance	10.5" (26.7 cm)	11" (27.9 cm)	12.5" (31.8 cm)	12.5" (31.8 cm)	13" (33 cm)	14" (35.6cm)	14" (35.6cm)	14" (35.6cm)	16" (40.6 cm)	16" (40.6 cm)
Fuel Capacity	7.25 gal (27.4 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)
Bed Box Dimensions (L x W x H)	20 x 40 x 9" <i>(51 x 102 x 23 cm)</i>	20.7 x 37 x 7.9" <i>(52.5 x 94 x 20 cm)</i>	20.7 x 37 x 7.9" <i>(52.5 x 94 x 20 cm)</i>	20.7 x 37 x 7.9" <i>(52.5 x 94 x 20cm)</i>	20.5" x 23" x 4.1" <i>(52 x 58 x 10.4 x 3 cm)</i>	28 x 22 x 7" <i>(72 x 57 x 17.8 cm)</i>	28 x 22 x 7" <i>(72 x 57 x 17.8 cm)</i>	28 x 22 x 7" <i>(72 x 57 x 17.8 cm)</i>	28 x 22 x 7" <i>(72 x 57 x 17.8 cm)</i>	28 x 22 x 7" <i>(72 x 57 x 17.8 cm)</i>
Rear Rack Capacity	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	50 lb (22.7 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)
Payload Capacity	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	300 lb (136.1kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)
Lighting	Halogen, 50W <i>Halogen, 55W low / 60W high</i>	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake / Accent Lights, & Front Accent Lighting	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake / Accent Lighting

PRO

4-SEAT



RZR PRO XP

RZR PRO XP PREMIUM

RZR PRO XP ULTIMATE

RZR S4 1000

RZR XP 4 1000

RZR XP 4 1000 PREMIUM

RZR XP 4 TURBO

RZR XP 4 TURBO S VELOCITY

RZR XP S4 TURBO S

4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged	4-Stroke DOHC Twin-Cylinder Turbocharged
181 HP	181 HP	181 HP	100 HP	110 HP	110 HP	168 HP	168 HP	168 HP
Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	High-Performance True On-Demand AWD / 2WDm	High-Performance True On-Demand AWD / 2WD	High Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD
Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped	Not Equipped
High-Clearance Dual A-Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 17" (43.2 cm) Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 17" (43.2 cm) Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 17" (43.2 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar 12.25" (31.1 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 20" (52.8 cm) Usable Travel, 16" (40.6 cm) of Wheel Travel	Dual A-Arm with Stabilizer Bar and 25" (63.5 cm) Usable Travel, 19" (48.2 cm) Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 25 in (63.5 cm) Usable Travel, 19 in (48.2 cm) of Wheel Travel
2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	FOX 2.5 Podium Shocks with Live Valve (Electronically Controlled Damping)	FOX - 2.0 Podium X (External Reservoir Shock with 24 Adjustable Clicker Positions)	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	2" Walker Evans Needle with 16-Position Adjustable Clickers	Walker Evans® 2.5" Velocity Needle Shock with 16-Position Adjustable Clickers	FOX 2.5 Podium Internal Bypass Shocks with Live Valve (Electronically Controlled Damping)
Trailing Arm & High-Clearance Radius Rods with Stabilizer Bar and 22" (55.9 cm) Usable Travel, 20" (50.8 cm) Wheel Travel	Trailing Arm & High-Clearance Radius Rods with Stabilizer Bar and 22" (55.9 cm) Usable Travel, 20" (50.8 cm) Wheel Travel	Trailing Arm & High-Clearance Radius Rods with Stabilizer Bar and 22" (55.9 cm) Usable Travel, 20" (50.8 cm) Wheel Travel	Dual A-Arm with Stabilizer Bar 13.2" (33.5 cm) Wheel Travel	Trailing Arm with Stabilizer Bar 21" (53.4 cm) Travel	Trailing Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 18" (45.72 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 20" (50.8 cm) Usable Travel, 18" (45.72 cm) Wheel Travel	Trailing Arm with Stabilizer Bar and 25" (63.5 cm) Usable Travel, 21" (53.3 cm) Wheel Travel	Trailing Arm & High-Clearance Radius Rods with Stabilizer Bar and 25 in (63.5 cm) Usable Travel, 21 in (53.3 cm) of Wheel Travel
2.5" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	FOX 2.5 Podium Shocks with Live Valve (Electronically Controlled Damping)	FOX - 2.0 Podium X (External Reservoir Shock With 24 Adjustable Clicker Positions)	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	2.5" Walker Evans Needle with 16-Position Adjustable Clickers	Walker Evans® 3.0" Velocity Needle Shock with 16-Position Adjustable Clickers	FOX 3.0 Podium Internal Bypass Shocks with Live Valve (Electronically Controlled Damping)
30 x 10-14 Maxxis Carnivore; (8-ply rated); Wheel Size 14x6	30 x 10-14 Maxxis Carnivore; (8-ply rated); Wheel Size 14x6	30 x 10-14 Maxxis Carnivore; (8-ply rated); Wheel Size 14x6	27 x 9-12; GBC Dirt Commander	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn	29 x 9-14; Maxxis Bighorn	32 x 10-15; ITP COYOTE (8-Ply Rated)	32 x 10-15; ITP COYOTE (8-Ply Rated)
30 x 10-14 Maxxis Carnivore;(8-ply rated); Wheel Size 14x7	30 x 10-14 Maxxis Carnivore;(8-ply rated); Wheel Size 14x7	30 x 10-14 Maxxis Carnivore;(8-ply rated); Wheel Size 14x7	27 x 11-12; GBC Dirt Commander	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn	29 x 11-14; Maxxis Bighorn	32 x 10-15; ITP COYOTE (8-Ply Rated)	32 x 10-15; ITP COYOTE (8-Ply Rated)
Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum
96" (243.8 cm)	96" (243.8 cm)	96" (243.8 cm)	106.5" (270.5 cm)	117" (297.2 cm)	117" (297.2 cm)	117" (297.2 cm)	117" (297.2 cm)	117" (297.2 cm)
1,736 lbs (789.2 kg)	1,749 lbs (795.1 kg)	1,773 lbs (806.0 kg)	1,506 lbs (670 kg)	1,659 lbs (754 kg)	1,669 lbs (759 kg)	1,721 lbs (782kg)	1,949 lbs (886 kg)	1,990 lbs (905 kg)
126 x 64 x 71.7" (320 x 162.6 x 182.1 cm)	126 x 64 x 71.7" (320 x 162.6 x 182.1 cm)	126 x 64 x 71.7" (320 x 162.6 x 182.1 cm)	138.1 x 60 x 71.7" (350.8 x 152.4 x 182.1 cm)	146 x 64 x 73.7" (370.8 x 162.6 x 187.3 cm)	146 x 64 x 73.8" (370.8 x 162.6 x 187.3 cm)	146 x 64 x 73.8" (370.8 x 162.6 x 187.3 cm)	149" x 72" x 76" (378.5 x 182.8 x 194.3 cm)	149" x 73.75" x 76.5" (378.5 x 187.3 x 194.3 cm)
14.5" (36.8 cm)	14.5" (36.8 cm)	14.5" (36.8 cm)	12.5" (31.8 cm)	14" (35.6cm)	14" (35.6cm)	14" (35.6cm)	16" (40.6 cm)	16" (40.6 cm)
12 gal (45.4 L)	12 gal (45.4 L)	12 gal (45.4 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)	9.5 gal (36.0 L)
26 x 17.7 x 11.5" (66 x 45 x 29.2 cm)	26 x 17.7 x 11.5" (66 x 45 x 29.2 cm)	26 x 17.7 x 11.5" (66 x 45 x 29.2 cm)	20.7 x 37 x 7.9" (52.5 x 94 x 20cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)	28 x 22 x 7" (72 x 57 x 17.8 cm)
300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)	300 lb (136.1 kg)
740 lb (335.6 kg)	740 lb (335.6 kg)	740 lb (335.6 kg)	900 lb (408 kg)	900 lb (408 kg)	900 lb (408 kg)	900 lb (408 kg)	900 lb (408 kg)	900 lb (408 kg)
Signature White LED, Low/High & Red LED Tail / Brake Lights	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting	Halogen, 55W Low / 60W High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High, Rear Red LED Tail / Brake / Accent Lights, & Front Accent Lighting	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High & Red LED Tail / Brake Lights	Signature Blacked Out White LED Low/High, Rear Red LED Tail / Brake / Accent Lights, & Front Accent Lighting

RECREATION / UTILITY



SPORTSMAN 450 H.O.
AVAILABLE EPS

SPORTSMAN 570
AVAILABLE EPS

SPORTSMAN 570 PREMIUM

SPORTSMAN 570 HUNTER EDITION

SPORTSMAN 850

SPORTSMAN 850 EPS PREMIUM

SPORTSMAN XP 1000

SPORTSMAN XP 1000 HUNTER EDITION

ENGINE & DRIVETRAIN

Engine Type	ProStar 500cc, 4-Stroke SOHC Single-Cylinder	ProStar 567cc, 4-Stroke DOHC Single-Cylinder	ProStar 567cc, 4-Stroke DOHC Single-Cylinder	ProStar 567cc, 4-Stroke DOHC Single-Cylinder	ProStar 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar 952cc, 4-Stroke SOHC Twin-Cylinder
Horsepower	33 HP	44 HP	44 HP	44 HP	78 HP	78 HP	90 HP	90 HP
Drive System	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	On-Demand AWD / 2WD
Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Equipped / Not Equipped	Standard / Standard	Standard / Standard	Standard / Standard	Standard / Standard	Standard / Standard	Standard / Standard

SUSPENSION

Front Suspension	MacPherson Strut, 8.2" (20.8 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	Dual A-Arm, IRS 8.2" (20.8 cm) Travel	Dual A-Arm, IRS 8.2" (20.8 cm) Travel	Straight Dual A-Arm, 9" (22.9 cm) Travel	Straight Dual A-Arm, 9" (22.9 cm) Travel	Straight Dual A-Arm, 9" (22.9 cm) Travel	Sealed High Clearance Arched Dual A-Arm 9" (22.9 cm) Travel
Rear Suspension	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Straight Dual A-Arm, Rolled IRS 10.25" (26 cm) Travel	Straight Dual A-Arm, Rolled IRS 10.25" (26 cm) Travel	Straight Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	Sealed High Clearance Arched Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel

TIRES & WHEELS

Front Tires	24 x 8-12; NS388	25 x 8-12; 489	26 x 8 -14; CST	26 x 8-14; PXT	26 x 8-14; CST	26 x 8-14; CST	26 x 8-14; CST	26 x 8 -14; PXT
Rear Tires	24 x 10-12; NS388	25 x 10-12; 489	26 x 10 -14; CST	26 x 11-14; PXT	26 x 10-14 CST	26x10-14; CST	26 x 10-14; CST	26 x 11-14; PXT
Wheels	Stamped Steel	Stamped Steel	Aluminum	Aluminum	Stamped Steel	Aluminum	Aluminum	Aluminum

DIMENSIONS & CAPACITIES

Wheelbase	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	50.5" (128.3 cm)	53" (134.6 cm)	53" (134.6cm)	53" (134.6 cm)	53" (134.6 cm)
Dry Weight	701 lb (318 kg) 713 lb (323 kg)	704 lb (319 kg) 716 lb (325 kg)	730 lb (332 kg)	753 lb (342 kg)	772 lb (350 kg)	785 lb (357 kg)	801 lb (363 kg)	886 lb (402 kg)
Overall Vehicle Size (L x W x H)	83 x 48 x 47" (210.8 x 121.9 x 119.4 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83 x 48 x 48" (210.8 x 121.9 x 121.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)	83.25 x 47.6 x 50.75" (211.4 x 120.9 x 128.9 cm)
Ground Clearance	10.5" (26.7 cm)	11" (27.9 cm)	11.5" (29 cm)	11.5" (29 cm)	11.5" (29 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)	11.5" (29.2 cm)
Seat Height	33.25" (84.5 cm)	33.75" (85.7 cm)	34.25" (85 cm)	34.25" (87 cm)	37" (94 cm)	37" (94 cm)	37" (94 cm)	37" (94 cm)
Fuel Capacity	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	4.5 gal (17.0 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)
Rear Box Dimensions (L x W x H)	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
Front/Rear Rack Capacity	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)
Payload Capacity	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	485 lb (220 kg)	575 lb (261 kg)	575 lb (261 kg)	575 lb (261 kg)	575 lb (261 kg)
Hitch Towing Rating	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)

Packages	Utility Package	Utility Package	-	Hunt Accessories Standard	-	Trail	Trail	Hunt Accessories Standard
Colors	Sage Green, Sonic Blue Sage Green, Sonic Blue	Sage Green, Titanium Metallic, Fury Red, Polaris Pursuit Camo Sage Green, Titanium Metallic, Fury Red, Polaris Pursuit Camo	Orange Rust, Radar Blue	Polaris Pursuit Camo	Sage Green, Fury Red	Orange Rust, Steely Blue, Polaris Pursuit Camo* (*package not included)	Stealth Gray	Polaris Pursuit Camo

TOURING

SCRAMBLER



SPORTSMAN XP 1000 S

SPORTSMAN TOURING 570
AVAILABLE EPS

SPORTSMAN TOURING 570 PREMIUM

SPORTSMAN TOURING 850 PREMIUM

SPORTSMAN TOURING XP 1000

SCRAMBLER 850

SCRAMBLER XP 1000 S

ProStar 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar 567cc, 4-Stroke DOHC Single-Cylinder	ProStar 567cc, 4-Stroke DOHC Single-Cylinder	ProStar 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar 952cc, 4-Stroke SOHC Twin-Cylinder	ProStar 850cc, 4-Stroke SOHC Twin-Cylinder	ProStar 952cc, 4-Stroke SOHC Twin-Cylinder
89 HP	44 HP	44 HP	78 HP	90 HP	78 HP	89 HP
True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD	On-Demand AWD / 2WD	True On-Demand AWD / 2WD	True On-Demand AWD / 2WD
Standard / Standard	Not Equipped / Not Equipped	Standard / Standard	Standard / Standard	Standard / Standard	Not Equipped / Not Equipped	Not Equipped / Not Equipped
Sealed High-Clearance Arched Dual A-Arm, 11.6" (29.5 cm) Travel	MacPherson Strut, 8.2" (20.8 cm) Travel	Sealed Straight Dual A-Arm, 8.2" (20.8 cm) Travel	Sealed Straight Dual A-Arm, 9" (22.9 cm) Travel	Sealed Straight Dual A-Arm, 9" (22.9 cm) Travel	Straight Dual A-Arm, 9" (22.9 cm) Travel	Sealed High Clearance Arched Dual A-Arm 12.5" (29.2 cm) Travel
Sealed Straight Dual A-Arm, Rolled IRS, 14" (35.6 cm) Travel	Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Sealed Dual A-Arm, IRS 9.5" (24.1 cm) Travel	Sealed Straight Dual A-Arm, IRS, 10.25" (26 cm) Travel	Sealed Straight Dual A-Arm, IRS, 10.25" (26 cm) Travel	Straight Dual A-Arm, Rolled IRS, 10.25" (26 cm) Travel	Sealed Straight Dual A-Arm, Rolled IRS, 14" (35.6 cm) Travel
27 x 9-14; Duro PowerGrip V2	25" x 8-12; 489	26 x 8-14; CST	26 x 8 - 14; CST	26 x 9-14; PXT	26 x 8 - 14; CST	27 x 9-12; Duro PowerGrip V2
27 x 11-14; Duro PowerGrip V2	25" x 10-12; 489	26 x 10-14; CST	26 x 10- 14; CST	26 x 11-14; PXT	26 x 10 - 14; CST	27 x 10-14; Duro PowerGrip V2
Aluminum	Stamped Steel	Aluminum	Aluminum	Aluminum	Steel	Aluminum
57.4" (145.8 cm)	56" (142.2 cm)	56" (142.2 cm)	57" (144.8 cm)	57" (144.8 cm)	53" (134.6 cm)	57.4" (145.8 cm)
970 lb (440 kg)	728 lb (330 kg) 739 lb (336 kg)	773 lb (351 kg)	804 lb (365 kg)	886 lb (403 kg)	735 lb (333 kg)	881 lb (400 kg)
83.5 x 55 x 49" (211 x 140 x 124.5 cm)	86 x 48 x 48" (218.4 x 121.9 x 121.9 cm)	86 x 48 x 48" (218.4 x 121.9 x 121.9 cm)	84.3 x 48.2 x 48.4" (214 x 123 x 124 cm)	84.3 x 48.2 x 48.4" (214 x 123 x 124 cm)	84.3 x 48.2 x 48.4" (214 x 123 x 124 cm)	82.5 x 55 x 49.5" (209.5 x 140 x 125.7 cm)
14.5" (37 cm)	11" (27.9 cm)	11" (27.9 cm)	11.25" (28.5 cm)	11.25" (28.5 cm)	11.5" (29.2 cm)	14.5" (37 cm)
37" (94 cm)	33.7" (85.7 cm)	34.25" (87 cm)	33.75" (85.7 cm)	35.7" (90.8 cm)	35" (89 cm)	37" (94cm)
5.25 gal (19.9 L)	6.75 gal (26.3 L)	6.75 gal (26.3 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)	5.25 gal (19.9 L)
N.A.	N.A.	N.A.	N.A.	N.A.	N.A.	N.A.
200 lb (91 kg) / 300 lb (136 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	90 lb (40.8 kg) / 180 lb (81.6 kg)	120 lb (55 kg) / 240 lb (110 kg)	120 lb (55 kg) / 240 lb (110 kg)	25 lb (11.3 kg) / 50 lb (22.7 kg)	25 lb (11.3 kg) / 50 lb (22.7 kg)
715 lb (324 kg)	485 lb (220 kg)	485 lb (220 kg)	575 lb (261 kg)	575 lb (261 kg)	290 lb (132 kg)	290 lb (132 kg)
1,750 lb (794 kg)	1,225 lb (555.7 kg)	1,225 lb (555.7 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	1,500 lb (680.4 kg)	N.A.
-	-	-	-	-	-	-
Orange Madness	Sonic Blue Titanium Metallic	Nara Bronze	Navy Blue	Pearl White	Orange Burst	Gloss Black Pearl

2-SEAT



POLARIS GENERAL 1000



POLARIS GENERAL 1000 PREMIUM



POLARIS GENERAL 1000 DELUXE

4-SEAT



POLARIS GENERAL 4 1000



POLARIS GENERAL 4 1000 DELUXE

ENGINE & DRIVETRAIN

SUSPENSION

TIRES & WHEELS

DIMENSIONS & CAPACITIES

	POLARIS GENERAL 1000	POLARIS GENERAL 1000 PREMIUM	POLARIS GENERAL 1000 DELUXE	POLARIS GENERAL 4 1000	POLARIS GENERAL 4 1000 DELUXE
Engine Type	ProStar 1000; 4-Stroke DOHC Twin-Cylinder	ProStar 1000; 4-Stroke DOHC Twin-Cylinder	ProStar 1000; 4-Stroke DOHC Twin-Cylinder	ProStar 1000; 4-Stroke DOHC Twin-Cylinder	ProStar 1000; 4-Stroke DOHC Twin-Cylinder
Horsepower	100 HP	100 HP	100 HP	100 HP	100 HP
Drive System	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode	On-Demand True AWD / 2WD / VersaTrac Turf Mode
Front Suspension	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel	Dual A-Arm with Stabilizer Bar and 12.25" (31.1 cm) Travel
Front Shocks	ZF Sachs Twin Tube	ZF Sachs Twin Tube	FOX 2.0 PODIUM X QS3	FOX 2.0 PODIUM X QS3	FOX 2.0 PODIUM X QS3
Rear Suspension	Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel	Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel	Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel	Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel	Dual Arm IRS with Stabilizer Bar and 13.2" (33.5 cm) Travel
Rear Shocks	ZF Sachs Twin Tube	ZF Sachs Twin Tube	FOX 2.0 PODIUM X QS3	FOX 2.0 PODIUM X QS3	FOX 2.0 PODIUM X QS3
Front Tires	27 x 9-12 NHS; CST Clincher	27 x 9-14; Maxxis Coronado	27 x 9-14; Maxxis Coronado	27 x 9-14; Dirt Commander	27 x 9-14; Dirt Commander
Rear Tires	27 x 11-12 NHS; CST Clincher	27 x 11-14; Maxxis Coronado	27 x 11-14; Maxxis Coronado	27 x 11-14; Dirt Commander	27 x 11-14; Dirt Commander
Wheels	Stamped Steel	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum
Wheelbase	81" (206 cm)	81" (206 cm)	81" (206 cm)	113" (287 cm)	113" (287 cm)
Dry Weight	1,430 lb (648 kg)	1,491 lb (676 kg)	1,544 lb (700 kg)	1,857 lb (842 kg)	1,860 lb (842 kg)
Overall Vehicle Size (L x W x H)	116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm)	116.4 x 62.5 x 73.8" (295.6 x 158.7 x 187 cm)	118.2 x 62.5 x 75" (300 x 158.7 x 190.5 cm)	150.2 x 62.5 x 75" (381.5 x 158.7 x 190.5 cm)	150.2 x 62.5 x 75" (381.5 x 158.7 x 190.5 cm)
Ground Clearance	12" (30.5 cm)	12" (30.5 cm)	12" (30.5 cm)	12" (30.5 cm)	12" (30.5 cm)
Fuel Capacity	9.5 gal (35.9 L)	9.5 gal (35.9 L)	9.5 gal (35.9 L)	9.5 gal (35.9 L)	9.5 gal (35.9 L)
Bed Box Dimensions (L x W x H)	27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm)	27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm)	27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm)	27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm)	27.5 x 43.1 x 11.6" (69.8 x 109 x 29.5 cm)
Rear Rack Capacity	600 lb (272 kg)	600 lb (272 kg)	600 lb (272 kg)	600 lb (272 kg)	600 lb (272 kg)
Payload Capacity	1,100 lb (499 kg)	1,100 lb (499 kg)	1,100 lb (499 kg)	1,280 lb (580 kg)	1,280 lb (580 kg)
Electronic Power Steering	Standard	Standard	Standard	Standard	Standard
Other Features		LED Headlights, Polaris HD 4,500 lb Winch Sport Low Profile Front Bumper, Premium Paint	Rockford Fosgate Stage 1 Audio, LED Headlights, Polaris HD 4,500 lb Winch, Sport Low Profile Front Bumper, ProFit Sport Roof, Convex Rear View Mirror, Premium Paint	LED Headlights, Polaris HD 4,500 lb Winch Sport Low Profile Front Bumper	Rockford Fosgate Stage 1 Audio, LED Headlights, Polaris HD 4,500 lb Winch, Sport Low Profile Front Bumper, ProFit Sport Roof, Convex Rear View Mirror, Premium Paint
Colors	White Lightning	Matte Titanium	Sunset Red, Black Pearl	Nara Bronze	Sunset Red

YOUTH



OUTLAW 110 EFI



SPORTSMAN 110 EFI



RZR 170 EFI



PHOENIX 200



RANGER 150 EFI

ENGINE

Age	10+	10+	10+	14+	10+
Engine Type	112cc, 4-Stroke Single-Cylinder	112cc, 4-Stroke Single-Cylinder	169cc, 4-Stroke Single-Cylinder	196cc, 4-Stroke Single-Cylinder	150cc, 4-Stroke, Single-Cylinder
Fuel System	EFI	EFI	EFI	Carbureted	EFI
Cooling	Air	Air	Fan	Air	Air/Oil

DRIVE TRAIN & SUSPENSION

Transmission/Final Drive	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; O-ring Chain	Automatic PVT F/N/R; Shaft	Automatic PVT F/N/R; O-ring Chain
Drive System	2WD	2WD	2WD	2WD	2WD
Front Suspension	Single A-Arm with 5" (12.7 cm) Travel	Single A-Arm with 5" (12.7 cm) Travel	Single A-Arm with 5" (12.7 cm) Travel	Dual A-Arm with 6.5" 7" (17.8 cm) Travel	Dual A-Arm with 5.1" (13 cm) Travel
Rear Suspension	Mono-Shock Swingarm with 6" (15.2 cm) Travel	Mono-Shock Swingarm with 6" (15.2 cm) Travel	Swingarm Dual Shocks with 5" (12.7 cm) Travel	Mono-Shock Swingarm with 6.5" (16.5cm) Travel	Mono-Shock Swingarm with 6" (15.2 cm) Travel

TIRES & WHEELS

Front Tires	19 x 7-8	19 x 7-8	19 x 7-8	21 x 7-10	22 x 7-10
Rear Tires	18 x 9.5-8	18 x 9.5-8	20 x 10-9	20 x 10-9	22 x 10-10
Wheels	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel

DIMENSIONS & CAPACITIES

Wheelbase	41.5" (105.4 cm)	41.5" (105.4 cm)	65" (165.1 cm)	45" (114.3 cm)	65" (165.1 cm)
Dry Weight	278 lb (126 kg)	289 lb (131 kg)	532 lb (241 kg)	420 lb (191 kg)	673 lb (305 kg)
Overall Vehicle Size (L x W x H)	61.3 x 36.8 x 38.5" (155.6 x 93.3 x 97.8 cm)	61.8 x 36.8 x 38.5" (156.8 x 93.3 x 97.8 cm)	85 x 48 x 55" (215.9 x 121.9 x 139.7 cm)	65 x 42 x 42 in. (165.1 x 106.7 x 106.7 cm)	85 x 48 x 58" (215.9 x 121.9 x 147.3 cm)
Ground Clearance	3.5" (8.9 cm)	3.5" (8.9 cm)	6" (15.2 cm)	5.7" (14.5 cm)	8" (20.3 cm)
Seat Height	27" (68.6 cm)	27" (68.6 cm)	N.A.	32" (81.3 cm)	N.A.
Fuel Capacity	1.6 gal (5.9 L)	2.0 gal (7.8 L)	2.5 gal (9.5 L)	2.5 gal (9.5 L)	2.5 gal (9.5 L)
Rear Box Dimensions (L x W x H)	N.A.	N.A.	N.A.	N.A.	N.A.
Front/Rear Rack or Box Capacity	N.A.	15 lb / 30 lb (6.8 kg / 13.6 kg)	N.A.	N.A.	50 lb (22.7 kg)
Payload Capacity	N.A.	45 lb (20.4 kg)	N.A.	N.A.	50 lb (22.7 kg)

Colors	Pink Power, Lime Squeeze	Velocity Blue	Cruiser Black / Lime Squeeze or Bright White / Indy Red	Avalanche Gray	Sage Green, White Lightning
---------------	--------------------------	---------------	---	----------------	-----------------------------

RANGER RZR GENERAL SPORTSMAN YOUTH/HIGH LIFTER RIDE COMMAND SPECS

POLARIS

POLARIS
GENERAL

POLARIS
RANGER

POLARIS
RZR

POLARIS
SPORTSMAN

Warning: Polaris off-road vehicles can be hazardous to operate and are not intended for on-road use. Driver must be at least 16 years old with a valid driver's license to operate. Passengers, if permitted, must be at least 12 years old. All riders should always wear helmets, eye protection and protective clothing. Always use seat belts and cab nets or doors (as equipped). Never engage in stunt driving, and avoid excessive speeds and sharp turns. Riding and alcohol/drugs don't mix. All riders should take a safety training course. Call 800-342-3764 for additional information. Check local laws before riding on trails. ©2019 Polaris Industries Inc.

Youth models have special age restrictions. The Polaris RZR 170 and ACE 150 are intended for operators ages 10 and older; 50-cc ATV models are intended for operators ages 6 and over; 110-cc ATV models are intended for operators ages 10 and older; and the 200-cc ATV is intended for operators age 14 and older. All Polaris youth vehicles require adult supervision at all times for operators under age 16.