



The call of
the **BLUE**




EXPERIENCE THE TECHNOLOGY OF CONFIDENT RIDING

SALUTO RX

NOW WITH

UBS

Unified Braking System

 Follow us on www.facebook.com/yamahamotorindia | www.yamaha-motor-india.com/salutorx




SALUTO RX

COLOURS



FEATURES

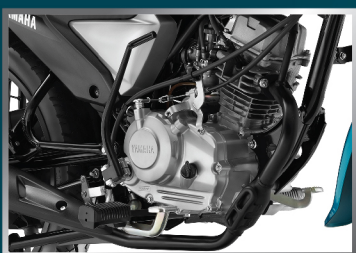

110 CC BLUE CORE ENGINE



NEW COLOURS AND GRAPHICS



EXTRA LONG SEAT FOR TANDEM RIDE COMFORT

UBS - Unified Braking System

UBS has been developed for better stopping power of your 2 wheelers. UBS links both front & rear brakes with the rear brake pedal. When the rider applies the rear brake, the rear brake and a portion of the front brake are applied. For full braking performance, apply both the brake lever and the brake pedal simultaneously.

UBS results in:

1. *Reduced braking distance*
2. *Better handling during braking*
3. *Smoother chassis behavior during braking*



110 CC
BLUE CORE ENGINE

LIGHT WEIGHT
(99 KG)

SHARP PICK UP
EASY HANDLING

SPECIFICATIONS

Dimensions

Overall Length X Width X Height	2020 mm X 745 mm X 1045 mm
Seat Height	785 mm
Wheelbase	1255 mm
Minimum Ground Clearance	175 mm
Wet Weight (With Oil And A Full Fuel Tank)	99 kg

Engine

Engine Type	Air Cooled, 4-stroke, Sohc, 2-valve
Cylinder Arrangement	Single Cylinder
Displacement	110 cc
Maximum Horse Power	5.5 KW (7.5 PS)/ 7000 r/min
Maximum Torque	8.5 N.m (0.9 kgf.m)/ 4500 r/min
Starting System Type	Electric Start And Kickstart
Lubrication System	Wet Sump
Fuel Tank Capacity	7.2 L
Carburetor Type/fuel Supply	Carburetor
Ignition System Type	TCI (Transistor Controlled Ignition)
Battery Type	AB5L-B / 12MX5L-B, 12 V, 5.0 Ah (10 HR)
Clutch Type	Wet, Multiple-disc
Transmission Type	Constant Mesh, 4-speed
Shift Type	Return

Chassis

Frame Type	Diamond
Tire Size (Front)	2.75-17 41P (Tube)
Tire Size (Rear)	3.00-17 50P (Tube)
Brake Type (Front & Rear)	Drum
Suspension Type (Front)	Telescopic Fork
Suspension Type (Rear)	Swingarm
Wheel Travel (Front)	120 mm
Wheel Travel (Rear)	100 mm
Headlight Bulb Type	Halogen Bulb
Headlight	12 V, 35/35 WX1
Brake/Tail Light	12 V, 21/5 WX1
Turn Signal Light (Front & Rear)	12 V, 10 WX2
Speedometer	Analogue
Fuel Gauge	Analogue



2yrs / 30,000kms warranty*
3yrs / 40,000kms extended warranty**



The specifications and designs of the motorcycles shown here may vary according to the requirements and are subject to change without prior notice. Colours shown may not match the actual colour due to printing limitations.
*Conditions apply. **Warranty extended for Engine Carburetor, AIS system and Electricals including wiring harness, whichever is earlier. 5-year warranty* only applicable in case of purchase of Yamaha Protection Plus Policy during validity period. Please refer to Yamaha Protection Plus Policy for more details.

Yamaha Motor India Sales Pvt. Ltd, AKDR Tower - 5th Floor, Door No, 3/381, Rajiv Gandhi Salai (OMR), Mettukupam, Chennai - 600 097 | Phone: 044-3814 7000, Toll Free No.: 1800 420 1600,

Email: info@yamaha-motor-india.com | [f](https://www.facebook.com/yamahamotorindia) Follow us on www.facebook.com/yamahamotorindia | www.yamaha-motor-india.com/salutorx

Authorised Dealer